


Specifications

SMART Response LE Interactive Response System

Receiver and Clicker

Physical Specifications

| | |
|---|--|
| Receiver Size | 4 3/4" W x 7/8" H x 2 1/4" D (12 cm x 2.2 cm x 5.7 cm) |
| Receiver Weight | 5 3/4 oz. (165 g) |
| Clicker Size | 2 1/4" W x 5 5/8" H x 1 1/8" D (5.7 cm x 14.2 cm x 2.8 cm) |
| Clicker Weight | 7 1/4 oz. (200 g) without batteries |
| Shipping Size | |
| 24 Clicker System (SRP-LE-24) | 22 5/8" W x 7 3/4" H x 13 5/8" D (57.5 cm x 19.8 cm x 34.5 cm) |
| 18 and 12 Clicker System (SRP-LE-18/SRP-LE-12) | 17 1/2" W x 11" H x 8 3/8" D (44.4 cm x 27.9 cm x 21.1 cm) |
| Shipping Weight | SRP-LE-24 – 12 lb. (5.4 kg) SRP-LE-18 – 10 lb. (4.5 kg) SRP-LE-12 – 8 lb. (3.7 kg) |

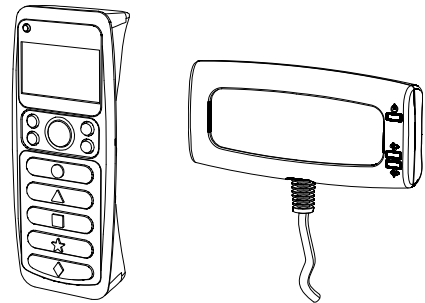

All dimensions +/- 1/8" (0.3 cm). All weights +/- 2 lb. (0.9 kg).

Standard Features

| | |
|------------------------|--|
| Software | SMART Response 2009 assessment software, including SMART Notebook software 10 for Windows® and Mac computers is included on the CD. Software upgrades are available at http://www.smarttech.com/Downloads . |
| Technology | RF 802.15.4 |
| Radio Frequency | 2.40 GHz to 2.50 GHz ISM band |
| Capacity | Supports up to 60 clickers with Model 1.1.3 receiver |

SMART Response Software Computer Requirements

Windows Operating Systems

Pentium® III 750 MHz or higher processor
512 MB of RAM (1 GB recommended)
750 MB of free hard disk space (minimum installation requirements)
2150 MB for full installation with Gallery content
Windows XP SP2 or later, Windows Vista® SP1 or Windows 7 operating system
Internet Explorer® Internet browser 6.0
Adobe® Flash® Player 10 or later
Adobe Reader® 8
Windows Media® Player 9 (required for SMART Recorder)
DirectX® technology 8.1 (required for SMART Video Player)

Mac Operating System Software

1 GHz Power PC® G4 or G5 or Intel® processor with 512 MB RAM
700 MB of free hard disk space (minimum installation requirements)
1500 MB for full installation with Gallery content
Mac OS X operating system software 10.5.x or 10.6.x
Safari application program 3.0.4 or later
Adobe Flash Player 10 or later

NOTE

SMART Response assessment software runs on 32-bit Windows and Mac operating systems only.

Receiver Features

Transmission Power

6 dBm with a typical range of 100' (30 m)

Antenna

Integrated antenna

Host Interface

USB 2.0 full-speed (12 Mbps) with a 6' (1.8 m) captive cable

LED Indicators

Red and green LED indicate power, transmit data, receive data and link status.

Configuration

Plug and play (SMART Response software required)

Clicker Features

| | |
|---------------------------------|--|
| Transmission Power | 6 dBm with a typical range of 100' (30 m) |
| Antenna | Integrated antenna |
| LCD Display | 1 5/8" W x 1" H (41.6 mm x 24.6 mm), 60° to 80° viewing angle and a contrast ratio of 5:1 |
| Key Pad | Buttons include: GREEN/CIRCLE, RED/TRIANGLE, BLUE/SQUARE, YELLOW/STAR, PURPLE/DIAMOND, ? (QUESTION MARK), UP, DOWN, HOME, ENTER, POWER |
| Configuration | Plug and play (no additional software required) |
| Batteries | 2 x AA alkaline |
| Regulatory Certification | IC (Industry Canada), C-Tick, CE, FCC, SRRRC (Pending), NOM (Pending) |
| Environmental Compliance | EU WEEE, RoHS (Europe), US CPSIA, US Packaging, China EIP |
| Warranty | Two-year limited equipment warranty |

Storage and Operating Specifications

| | |
|------------------------------|--|
| Operating Temperature | 41°F to 95°F (5°C to 35°C) |
| Operating Humidity | 5% to 85% relative humidity (non-condensing) |
| Storage Temperature | -40°F to 131°F (-40°C to 55°C) |
| Storage Humidity | 5% to 90% relative humidity (non-condensing) |


SMART Order Numbers

| | |
|------------------|--|
| SRP-LE-24 | Includes 1 receiver, 24 clickers, carrying case for 40 clickers, Phillips® No. 1 screwdriver, 48 AA batteries, Quick Start Guide and software CD |
| SRP-LE-18 | Includes 1 receiver, 18 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 36 AA batteries, Quick Start Guide and software CD |
| SRP-LE-12 | Includes 1 receiver, 12 clickers, carrying case for 20 clickers, Phillips No. 1 screwdriver, 24 AA batteries, Quick Start Guide and software CD |


Optional Accessories

| | |
|---------------------|--|
| SRP-LE-RMT-5 | Includes 5 clickers and 10 AA batteries |
| SRP-LE-RMT-1 | Includes 1 clicker and 2 AA batteries |
| SRP-LE-RCV-1 | Includes a receiver and software CD |
| SRP-LE-CC | Carrying case for 1 receiver and 40 clickers |
| SRP-LE-CC-SM | Carrying case for 1 receiver and 20 clickers |

Physical Dimensions

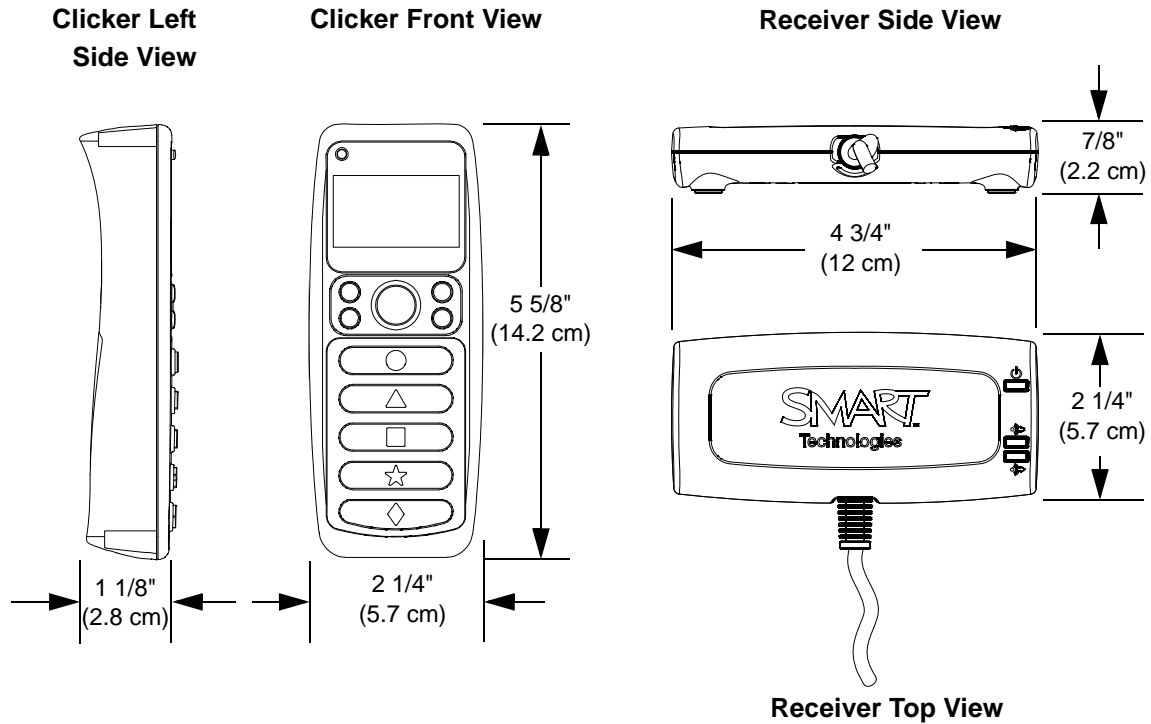

Viewing Angle

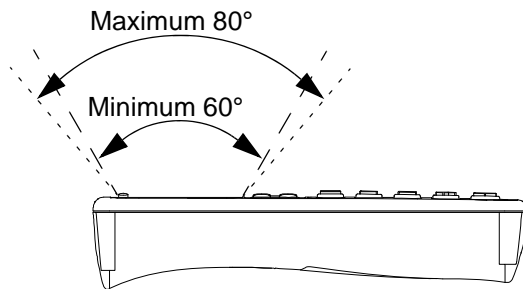

www.smarttech.com/support www.smarttech.com/contactsupport
Support +1.403.228.5940 or Toll Free 1.866.518.6791 (U.S./Canada)

